BuzziNest Pod Product Specification Sheet

This document contains technical information about the BuzziNest Pod



Silent workspaces anywhere

BuzziNest Pod is all you need to erase distractive noise from any workplace. The compact acoustic privacy booth offers a private space to work and take calls, and can additionally accommodate up to four people to hold face-to-face meetings and collaborations in any open space without disturbing others, and most importantly, being disturbed. Due to its upholstered exterior and fabric panels on the interior, BuzziNest Pod effectively dampens sound from every direction to create maximum peace and quiet for everyone in the office, whether you are working inside BuzziNest Pod or out.

BuzziNest Pod is also customizable with high-quality materials and furniture. Choose from a wide range of fabrics, frames, shelf and table finishes, seating options, and table heights. The mobile BuzziNest Pod can easily fit into an existing space and comes fully packaged with a top-of-the-line motion sensor fresh air ventilation system, automatic LED lighting system, main power outlet (230V), and two USB chargers (type A and C).

Design by BuzziSpace Studio

General

BuzziNest Pod

Structure: Laminated poplar plywood with visible trim

Cover: Inside: Felt, Felt Printed or 3D pattern in Fabric or Trevira CS+
Outside: Fabric covered foam with Fabric or Trevira CS+

Flat Packed Installation time 2 hours, including unboxing

Optional Table Low | High with electrification

BuzziNest Cube
BuzziMilk Stool
BuzziMilk Bar

Acoustics













Absorption

Diffusion

Attenuation

Low Tone

Mid tone

High tone

Certifications










Content

Configurations	3	Finishes	9
Components	4	Dimensions	10
Fabrics	8	Acoustics	13

Configurations

BuzziNest Pod



BuzziNest Pod

Structure: Laminated poplar plywood with visible trim

Cover: Inside: Felt, Felt Printed or 3D pattern in Fabric or Trevira CS+ Outside: Fabric covered foam with Fabric or Trevira CS+

Power:

Mains supply: 230V, 50 Hz, max 10A Stand-by consumption: 1,2W Consumption when in use: 13,7W Internal fuses: 2 x 10A glass fuses

(5 x 20mm, speed T)

Lighting unit:

Power usage: 14W Input: 230V / 50Hz

Lumen output: 1260 lumen Color Temperature: 4000K Color Rendering Index: >80

Ventilation unit:

Power usage: 5,76W

Input: 12V dc

ನೆ

 $\vec{\Delta}\vec{\Delta}$

...

Air flow rate when occupied: 15l/s

Air flow rate after 5 mins no occupation: 81/s

Output:

combined

Table socket – 230V, 50Hz, max 6A

Twin USB charger – type A and C, max 5A at 5VDC

Crate 2

Air flow rate stand-by mode, after 15 mins no occupation: 31/s

2 palletized crates Installed Crate 1 Length: 240 cm | 94.5"

Length: 222 cm | 87.5 " Length: 222 cm | 87.5 " Height: 218 cm | 85.8" Heigth: 144 cm | 56.7 " Heigth: 144 cm | 56.7 " Width: 125 cm | 49.2" Width: 72 cm | 28.3 " Width: 88 cm | 34.5 "

590 kg | 1300 lbs 460 kg | 1014 lbs 483 kg | 1065.8 lbs

Optional Table Low | High with electrification

BuzziNest Cube BuzziMilk Stool BuzziMilk Bar



Components

Outside

The outside shell is available in Fabric, Trevira CS+





Fabric


TRevira CS+

Inside

The inside cover is available in Felt, Felt Printed, Fabric* or Trevira CS+* (*only in combination with 3D Rib)







Felt Printed



3D Rib Fabric/ Trevira CS+

Floor Cover

The floor cover is always in black carpet.



Frame

Frame is available in Laminated plywood White, Black or Truffle Grey







White Black Truffle Grey

Door Handle

Material: Oak with inlay in same color as frame





Table Low | High including electrification (optional)

Table Low | High in Oak or Laminated plywood White, Black or Truffle Grey with visible trim.

The table base is always in the same color as the frame.

Mains power outlet and 2 USB chargers (type A and C) max 5A at 5VDC combined.

When the BuzziNest is selected without table containing electrification, a Wieland connector is foreseen underneath the carpet to accommodate a 3rd party electrification unit.





Available for:

NL|DE|LUX

BE|FR

UK

AUS

CH

CN

Lighting



Integrated LED Light Power usage: 14W Input: 230V / 50Hz

Lumen output: 1260 lumen Color Temperature: 4000K Color Rendering Index: >80

Ventilation



For healthy air circulation there is a integrated ventilation. Cutout for sprinkler possible. (please reach out to customer service for instructions)

Power usage: 5,76W Input 12V dc Air flow rate:

- when occupied: 15l/s


- after 5 mins no occupation: 8l/s

- stand-by mode, after 15 mins no occupation: 3l/s

Power Connection

You can choose where to connect the power supply: at the side or on top. Selecting the proper power inlet can be done by a switch situated behind the internal acoustic panels.







Wheels



The BuzziNest Pod is moveable by the 4 wheels underneath. Floor adjusters are integrated for leveling.

BuzziNest Cube (optional)



BuzziNest Cubes, in combination with the low table, are the ideal elements to hold a comfortable meeting. See BuzziCube Flat for possible upholsteries. Wheight: 16,5 kg | 36.38 lbs

BuzziMilk Stool (optional)



Combine BuzziMilk Stool with the low table to accommodate short meetings.

BuzziMilk Bar (optional)



BuzziMilk Bar stools pair perfectly with the high table.

Fabrics

Felt



Composition 100% Recycled P.E.T. Felt, latex backing

Weight 1.000 g/m2 | 29.49 oz/yd2 Abrasion resistance > 7.000 Martindale

Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0

USA: ASTM E84 Class A certified

Fastness to light USA 5



Printed Felt



Composition 100% Recycled P.E.T. Felt, latex backing

Weight 1.000 g/m2 | 29.49 oz/yd2 Abrasion resistance > 7.000 Martindale

Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0

USA: ASTM E84 Class A certified

Fastness to light USA 5



Fabric



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,

5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).

EN 1021.2/2006 | BS EN 1021.2/2006 (match)

USA: CAL TB 117 | ASTM E84 CLASS A

Fastness to light EU: 4 | USA 4


Fastness to rubbing EU: Wet 3-4 \mid Dry 4-5 Fastness to crocking USA: Wet 5 | Dry 5







Trevira CS+



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard

USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |

IMO Res. A652 (16)

Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5 Fastness to crocking USA: Wet 5 | Dry 5











Finishes

Laminated Plywood with visible lining

Frame and table



Wood


Door handle and table




Oak

Dimensions

BuzziNest Pod



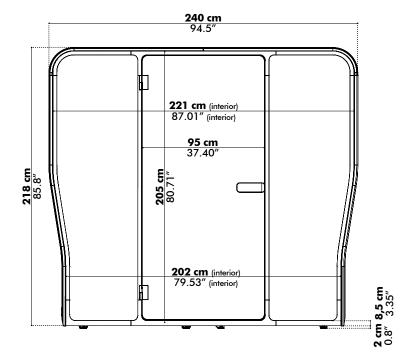

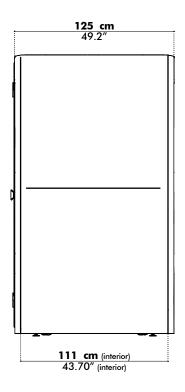





Table low














Table High












BuzziNest Cube







Acoustics

Sound blocker



- a) Exterior: upholstered foam
- b) Interior: acoustic Felt or 3D Rib foam pattern
- c) Glass with acoustic foil

Peace and quiet inside

27dB sound reduction, a conversation is turned into an indistinguishable whisper.

Acoustic Principles



Max. absorption on the outside



Max. attenuation on the inside

High performer on all frequencies, especially speech frequencies



Low tones




Mid tones



High tones


Speech Level Reduction*



Hz	dB Left Seat	dB Right Seat
125	19.1	19.2
250	24.8	25.1
500	27.1	27.8
1000	31.0	31.6
2000	31.7	31.6
4000	30.8	33.0
8000	38.5	40.1

Rating According to ISO 23351-1:2020 Left Seat: Speech Level Reduction, $D_{S,A} = 27.8 \text{ dB}$ Right Seat: Speech Level Reduction, $D_{S,A} = 28.4 \text{ dB}$

Equivalent sound absorption area in m² per object*



Hz	Aeq/m²
125	1.6
250	2.7
500	3.3
1000	5.9
2000	7.7
4000	8.9

^{*}Full test report available on our website